



Lawn, Garden & Golf

Tires | Wheels | Tubes



***Making Customers'
Lives Easier®***



OTR Engineered Solutions (OTR)

is your global partner for high-quality off-the-road tires, wheels, assemblies, and accessories. We are proud to supply end-user customers, dealers, and original equipment manufacturers with engineered solutions to meet and exceed common – and uncommon – challenges in such core markets as Agriculture, Construction, Forestry, Industrial, Lawn & Garden, Material Handling, Mining, Powersports, and Specialty Vehicles. But our success is much more than the products we offer. We're a multinational enterprise with more than 1,400 employees throughout 30+ facilities worldwide dedicated to supporting you with a full range of high-level services.

Lawn, Garden & Golf Products

OTR's product line-up for turf care is the result of many years of experience, innovations, and a hands-on approach that ensures our products get the job done. Whether focusing on productivity and machine utilization, comfort and safety, or value for the money, OTR's team will help you find the right solution.



Table of Contents

Tires

GRASS MASTER	7-10
GRASS MASTER XT	10
HBR LAWN MASTER	11
LITEFOOT	12
LITEFOOT PRO	13
LAWN BOSS	13-14
ZERO-T.....	14-15
ZERO-T II.....	15
REAPER	16
BIG BITE.....	17-18
HK45	18
TR-34.....	18
WORKBOSS CT.....	19
ULTRA CHEVRON	20
CHEVRON	20
CHEVRON II	21
SOFT FOOT	22
GARDEN MASTER	22
LAWN TRAC	23
22 MAG.....	24
XT-41	24
FIELD MASTER.....	25
ROUGH TAMER.....	26
SAWTOOTH	27
SMOOTH	27-28
FLEX SMOOTH	29
RIB.....	30
SEMI PNEUMATIC FLEX RIB.....	31
BUSHMASTER RIB	32
350 MAG	33
FAIRWAY MASTER.....	34
PROWLER	35
TEE MASTER.....	36
GC.....	37

Tubes	38-39
--------------------	-------

Wheels

ROTARY CUTTER WHEELS.....	40
UNIVERSAL FIT FRONT WHEELS.....	41
UNIVERSAL FIT REAR WHEELS.....	42-43

NDX Assemblies	44-45
-----------------------------	-------

Services

Mounting & Sequencing	46
TyrLyner®	47

Information & Disclaimers	48
--	----

Tires

Quick Reference Guide



GRASS MASTER 7-10



GRASS MASTER XT 10



HBR LAWN MASTER 11



LITEFOOT 12



LITEFOOT PRO 13



LAWN BOSS 13-14




ZERO-T 14-15



ZERO-T II 15



REAPER 16



BIG BITE 17-18



HK45 18



TR-34 18



WORKBOSS CT 19



ULTRA CHEVRON 20



CHEVRON 20



CHEVRON II 21



SOFT FOOT 22



GARDEN MASTER 22



LAWN TRAC 23



22 MAG 24

Lawn, Garden & Golf **Tires**



XT-41

24



FIELD MASTER

25



ROUGH TAMER

26




SAWTOOTH

27



SMOOTH

27-28



FLEX SMOOTH

29



RIB

30



**SEMI PNEUMATIC
FLEX RIB**

31




**BUSHMASTER
RIB**

32



350 MAG

33



FAIRWAY MASTER

34




PROWLER

35



TEE MASTER

36



GC

37



Brand	Walk-Behind Mower	Ride-On Mower	Stand-on Mower	Zero Turn Mowers	Front Mount Mower	Garden Tractor	Rotary Cutter	Golf Cart
GRASS MASTER		X	X	X		X		
GRASS MASTER XT		X	X	X		X		
HBR LAWN MASTER		X		X				
LITEFOOT		X	X	X		X		
LITEFOOT PRO						X		
LAWN BOSS		X	X	X		X		
ZERO-T		X	X	X		X		
ZERO-T II		X	X	X		X		
REAPER		X	X	X		X		
BIG BITE		X	X	X		X		
HK45		X	X	X				
TR-34						X		
WORKBOSS CT						X		
ULTRA CHEVRON				X		X		
CHEVRON		X	X		X	X		
CHEVRON II		X	X		X	X		
SOFT FOOT				X		X		
GARDEN MASTER						X		
LAWN TRAC						X		
22 MAG				X		X		
XT-41						X		
FIELD MASTER						X		
ROUGH TAMER	X	X			X			
SAWTOOTH	X	X						
SMOOTH	X	X	X	X	X			
FLEX SMOOTH	X	X	X	X	X			
RIB	X	X	X	X	X		X	
SEMI PNEUMATIC FLEX RIB	X	X	X	X	X			
BUSHMASTER RIB							X	
350 MAG		X	X	X		X		X
FAIRWAY MASTER								X
PROWLER								X
TEE MASTER								X
GC								X

Note: Applications above are for reference only, consult with your OTR salesperson to verify the best fitment options for your specific application(s).

GRASS MASTER

GRASS MASTER provides exceptional turf-friendly performance for zero-turn, riding and stand-up lawn mowers. Its unique S-shaped tread design optimizes ground contact for superior traction. It won't damage lawns even when making sharp turns and maneuvering on slopes. It's durable, long-lasting and reliable, making it the preferred tire solution for leading OEMs.



NDX™

The Tire That Never Goes Flat

GRASS MASTER is available with OTR's exclusive, patent-pending NDX™ airless technology. See pages 44-45 for details.

Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
15X6.00-6	2	14 (95)	14.3 (364)	6.2 (158)	6X4.5	570@10 (257@15)	T802156006
15X6.00-6	4	14 (95)	14.2 (360)	6.0 (152)	6X4.5	365@10 (165@15)	T804156006
16X6.50-8	4	28 (190)	16.0 (406)	6.5 (166)	8X5.375	615@10 (280@15)	T804166508
16X7.50-8	4	TBA	16.0 (406)	7.0 (178)	8X5.38	760@10 (345@15)	T804167508
16X7.50-8	6	38 (260)	16.0 (406)	7.0 (178)	8X5.38	760@10 (345@15)	T806167508
18X6.50-8	4	28 (190)	17.0 (431)	6.5 (165)	8X5.38	675@10 (307@15)	T804186508
18X6.50-10	4	12 (80)	17.5 (445)	6.0 (152)	10X5	740@10 (335@15)	T8041865010
18X7.00-8	4	26 (180)	17.8 (452)	7.1 (180)	8X5.375	785@10 (355@15)	T804187008
18X7.50-8	4	24 (165)	18.0 (457)	7.5 (190)	8X5.38	805@10 (365@15)	T804187508
18X8.50-8	4	10 (70)	17.8 (453)	8.7 (221)	8X7.00	465@10 (212@15)	T802188508
18X8.50-8	4	22 (150)	17.9 (454)	8.7 (221)	8X7	825@10 (375@15)	T804188508
18X8.50-10	4	22 (150)	17.7 (450)	8.1 (206)	10X7.00	780@10 (345@15)	T8041885010
18X8.50-10	6	32 (220)	17.9 (455)	8.5 (215)	10X7.00	1,050@10 (475@15)	T8061885010
18X8.50-10	8	44 (300)	17.9 (455)	8.5 (215)	10X7.00	1,230@10 (560@15)	T8081885010
18X9.50-8	4	24 (165)	18.3 (466)	9.1 (231)	8X7	935@10 (425@15)	T804189508



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
GRASS MASTER CONTINUED							
18X9.50-8	4	24 (165)	18.3 (464)	9.3 (235)	8X7	935@10 (425@15)	T804189508FP
18X10.50-10	4	20 (140)	17.9 (455)	10.2 (259)	10X8.50	935@10 (425@15)	T80418105010FP
18X10.50-10	4	22 (150)	18.0 (456)	9.9 (252)	10X8.5	990@10 (450@15)	T80418105010
18X10.50-10	8	36 (250)	18.8 (478)	8.1 (206)	10X8.50	1,320@10 (600@15)	T18105100006
20X6.50-10	4	28 (190)	19.5 (495)	6.7 (170)	10X5.5	855@10 (387@15)	T8042065010
20X8.00-8	4	22 (150)	20.0 (507)	8.2 (209)	8X6.5	965@10 (437@15)	T804208008
20X8.00-8	4	22 (150)	19.9 (505)	8.7 (220)	8X6.5	965@10 (437@15)	T804208008FP
20X8.00-10	4	24 (165)	19.6 (498)	7.7 (196)	10X6.5	850@10 (375@15)	T8042080010
20X10.00-8	4	22 (150)	19.7 (500)	9.8 (249)	8X7	1,200@10 (545@15)	T8042010008
20X10.00-8	8	44 (300)	19.7 (500)	10.0 (254)	8X7.00	1,650@10 (750@15)	T20108012
20X10.00-10	4	22 (150)	19.5 (495)	9.6 (243)	10X7	1,170@10 (530@15)	T80420100010
20X10.50-8	4	22 (150)	19.1 (485)	10.3 (262)	8X7	1,250@10 (560@15)	T8042010508FP
20X10.50-8	6	TBA	TBA	TBA	TBA	TBA	T2010508004
20X12.00-10	4	20 (140)	20.2 (512)	11.0 (279)	10X8.5	1,320@10 (600@15)	T80420120010
22X9.50-12	4	22 (150)	21.6 (548)	8.8 (223)	12X7	1,170@10 (530@15)	T8042295012FP

OTR's GRASS MASTER is a recognized industry-leading tire preferred by dealers and well-known OEMs. It's our BEST all around turf tire.

“The OTR GRASS MASTER is a very well built tire for lawn care equipment. This tough tire can handle the rigors of commercial equipment being used daily or the personal lawn tractor being used once a week. The tread pattern offers good traction without the hassles of tearing up delicate lawns. We recommend Grass Master as a replacement tire for anyone's lawn care equipment for its longevity, durability, and great overall performance.”

– Rob Desotel, Cedar Rapids Tire

“We have been selling the OTR GRASS MASTER for more than fifteen years with absolutely no problems whatsoever. We carry other lines, but with certainty the Grass Master outperforms all other brands. This tire is heavier and gives the customer a much better bang for the buck in performance and durability. In all these years I cannot recall ever having a problem with this product.”

– Tony Case, Hesselbein Tire Co.



Lawn, Garden & Golf **Tires**

Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
GRASS MASTER <i>CONTINUED</i>							
22X10.50-12	4	22 (150)	22.4 (568)	10.3 (262)	10 X 8.50	1,320@10 (600@15)	T80422105012
22X11.00-10	2	10 (70)	21.1 (536)	11.0 (279)	10X8.5	1,050@10 (475@15)	T80222110010
22X11.00-10	4	22 (150)	21.3 (541)	11.1 (281)	10X8.5	1,050@10 (475@15)	T80422110010
22X12.00-12	4	20 (140)	22.0 (559)	11.6 (294)	12X8.5	1,480@10 (670@15)	T80422120012
23X10.50-12	4	22 (150)	22.5 (572)	10.4 (264)	12X8.5	1,320@10 (600@15)	T80423105012
23X9.50-12	4	20 (140)	22.8 (580)	9.4 (239)	12X7	1,375@10 (615@15)	T8042395012FP
24X8.50-14	8	44 (300)	23.8 (605)	8.4 (213)	14X7	1,710@10 (775@15)	T8082485014
24X9.50-12	4	24 (165)	23.7 (603)	9.6 (243)	12X7	1,375@10 (615@15)	T8042495012FP
24X9.50-12	4	24 (165)	23.7 (603)	9.6 (243)	12X7	1,375@10 (615@15)	T8042495012
24X9.50-14	4	20 (140)	24.0 (610)	9.3 (237)	14X7	1,280@10 (580@15)	T8042495014
24X12.00-12	4	20 (140)	24.0 (610)	12.0 (305)	12X10.5	1,710@10 (775@15)	T80424120012
24X12.00-12	4	20 (140)	24.0 (610)	12.0 (305)	12X10.5	1,710@10 (775@15)	T80424120012FP
24X12.00-12	6	32 (220)	24.2 (615)	11.6 (295)	12X10.50	2,260@10 (1,000@15)	T80624120012
24X12.00-14	4	20 (140)	24.0 (610)	12.0 (305)	14X10.5	1,615@10 (730@15)	T80424120014
25X8.50-14	4	22 (150)	24.8 (630)	8.6 (218)	14X7	1,650@10 (750@15)	T8062585014FP
25X9.00-12	4	8 (55)	23.9 (607)	9.3 (237)	12X7	1,390@10 (630@15)	T8042590012
25X10.00-12	4	22 (150)	25.0 (636)	10.1 (258)	12X7	1,610@10 (730@15)	T80425100012
25X12.00-12	4	12 (80)	23.8 (605)	12.1 (307)	12X10.5	1,740@10 (775@15)	T80425120012
26X9.50-12	4	20 (140)	25.5 (647)	9.5 (242)	12X7	1,590@10 (710@15)	T8042695012FP
26X10.50-12	4	22 (150)	26.0 (660)	10.5 (267)	12X8.5	1,590@10 (710@15)	T80426105012
26X12.00-12	4	20 (140)	25.4 (645)	12.1 (307)	12X10.5	1,760@10 (800@15)	T80426120012
26X12.00-12	6	30 (210)	25.4 (645)	12.4 (315)	12X10.5	2,270@10 (1,030@15)	T80626120012
26X12.00-12	8	50 (345)	25.2 (640)	12.6 (321)	12X10.50	1,760@10 (800@15)	T80826120012



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
GRASS MASTER <i>CONTINUED</i>							
26X12.00-12	10	50 (345)	25.2 (640)	12.4 (316)	12X10.50	3,080@10 (1,400@15)	TR81026120012
26X12.00-16	4	20 (140)	25.9 (657)	11.8 (300)	16X10.5	1,820@10 (825@15)	T80426120016FP
29X12.50-15	10	TBA	TBA	TBA	TBA	TBA	T2912515002
31X15.50-15	10	TBA	TBA	TBA	TBA	TBA	T81031155015

GRASS MASTER XT

The GRASS MASTER XT (GMXT) tire features a turf-friendly design that blends an aggressive tread pattern with improved traction on slopes to help maximize productivity for zero-turn, riding, and stand-on mowers.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50-8	4	22 (150)	17.7 (450)	8.5 (216)	8X7.00	825@10 (375@15)	T24804188508
18X8.50-10	4	22 (150)	17.8 (452)	8.1 (206)	10X7.00	825@10 (375@15)	T248041885010
18X10.50-10	4	24 (165)	17.9 (455)	9.9 (252)	10X8.50 I	1,100@10 (500@15)	T2480418105010
20X6.50-10	4	28 (190)	19.6 (498)	6.4 (163)	10X5.50	880@10 (400@15)	T248042065010
20X8.00-10	4	22 (150)	19.7 (500)	7.8 (198)	10X6.50	935@10 (425@15)	T248042080010
20X10.00-8	4	22 (150)	19.5 (494)	9.7 (246)	8X7.00	1,200@10 (545@15)	T248042010008
20X10.00-10	4	22 (150)	19.5 (495)	9.3 (236)	10X7.00	1,170@10 (530@15)	T2480420100010
22X11.00-10	4	22 (150)	21.8 (552)	10.8 (273)	10X7.00AT	1,480@10 (670@15)	T2480422110010
22X12.00-12	4	20 (140)	21.7 (551)	11.4 (290)	12X8.50	1,480@10 (670@15)	T2480422120012
23X9.50-12	4	20 (140)	22.8 (579)	9.3 (236)	12X7.00	1,280@10 (580@15)	T248042395012
23X10.50-12	4	20 (140)	22.8 (578)	10.4 (263)	12X8.50	1,320@10 (600@15)	T2480423105012

Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
GRASS MASTER XT <i>CONTINUED</i>							
24X12.00-12	4	20 (140)	23.6 (599)	11.9 (301)	12X10.50AT	1,710@10 (775@15)	T2480424120012
26X12.00-16	4	20 (140)	26.0 (660)	11.7 (297)	16X10.50AT	1,820@10 (825@15)	T2480426120016
18X7.50-8	4	13 (90)	17.8 (452)	7.3 (185)	8X5.375 I	550@10 (250@15)	T24804187508
20X8.00-8	4	22 (150)	19.9 (505)	8.1 (206)	8X6.50	965@10 (437@15)	T24804208008
20X12.00-10	4	20 (140)	19.9 (506)	11.6 (295)	10X8.50	1,320@10 (600@15)	T2480420120010

HBR LAWN MASTER

HBR LAWN MASTER is a low-profile tire designed to minimize ground compaction. Lugs angled diagonally across the tire's contact patch, coupled with gently sloping shoulders, make this a well-suited tire for residential mowing and turf requiring extra care. Its wide stance improves grip and handling as well.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
15X6.00-8	2	14 (95)	15.0 (381)	6.0 (152)	8 X 4.50	355@10 (160@15)	T8702156008
15X6.00-8	2	14 (95)	14.3 (363)	6.0 (152)	8 X 4.50	355@10 (160@15)	T8702156008S
16X6.00-8	2	14 (95)	15.8 (400)	6.3 (159)	8 X 4.50	385@10 (175@15)	T8702166008
18X7.50-10	4	24 (165)	18.1 (460)	7.5 (190)	10 X 6.0AT	785@10 (355@15)	T87041875010
20X8.50-12	2	10 (70)	20.0 (507)	8.7 (222)	12X7.5	585@10 (265@15)	T87022085012FP
20X8.50-12	4	10 (70)	20.0 (507)	8.7 (222)	12X7.5	585@10 (265@15)	T87042085012FP
22X10.00-14	4	22 (150)	21.9 (555)	9.2 (234)	10 X 8.50	1,230@10 (560@15)	T870422100014
24X9.50-14	4	20 (140)	24.0 (610)	9.3 (235)	14 X 8.00AT	1,820@10 (825@15)	T87042495014
24X12.00-14	4	20 (140)	24.0 (610)	12.0 (305)	14X10.5AT	1,650@10 (750@15)	T870424120014
26X12.00-16	4	20 (140)	25.8 (655)	11.8 (300)	16X10.5AT	1,820@10 (825@15)	T870426120016



LITEFOOT

LITEFOOT delivers good performance and value, with exceptional traction, turf-protection, and durability. It's especially well-suited for smaller turf equipment as an alternative to our premium GRASS MASTER tire.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
22X8.50-12	4	22 (150)	22.3 (565)	8.5 (216)	12X7	1,100@10 (500@15)	T4042285012
22X10.00-10	4	20 (140)	22.2 (565)	9.5 (242)	10 X 8.50	1,200@10 (545@15)	T40422100010
22X11.00-10	4	22 (150)	21.6 (549)	11.2 (284)	10X8.5	1,395@10 (630@15)	T40422110010FP
22.5X10.00-8	4	22 (150)	22.6 (574)	10.2 (260)	8X8	1,390@10 (630@15)	T40422510008
23X11.00-10	4	22 (150)	21.6 (549)	11.2 (284)	10X8.5	1,480@10 (670@15)	T40423110010FP
23X8.50-12	4	22 (150)	22.6 (574)	8.2 (209)	12X7	1,100@10 (500@15)	T4042385012
23X9.50-12	4	24 (165)	23.1 (586)	9.3 (235)	12X7	1,225@10 (545@15)	T4042395012
23X10.50-12	4	TBA	TBA	TBA	TBA	TBA	T40423105012
23X10.50-12	4	20 (140)	23.0 (585)	10.0 (253)	12X8.5	1,320@10 (600@15)	T4042310512
23X10.50-360	6	40 (275)	23.2 (589)	9.4 (238)	14X8	1,320@10 (600@15)	T406231050360
24X9.50-12	4	24 (165)	23.3 (591)	9.8 (248)	12X7	1,375@10 (615@15)	T4042495012
24X9.50-12	6	34 (235)	23.7 (603)	9.9 (252)	12X7.00	1,710@10 (775@15)	T4062495012
24X12.00-12	4	20 (140)	22.9 (582)	11.5 (292)	12X10.50	1,710@10 (775@15)	T40424120012
24X12.00-12	6	32 (220)	23.2 (589)	12.0 (305)	12X10.50	2,270@10 (1,030@15)	T40624120012
26X12.00-12	4	20 (140)	25.4 (646)	12.4 (314)	12X10.5	1,760@10 (800@15)	T40426120012
26X12.00-12	4	20 (140)	24.8 (630)	12.8 (325)	12X10.5	1,760@10 (800@15)	T40426120012FP
26X12.00-12	6	35 (240)	25.8 (655)	12.2 (310)	12X10.50	3,020@10 (1,360@15)	T40626120012FP
26X14.00-12	4	18 (125)	25.7 (653)	13.7 (349)	12X10.5	1,500@10 (670@15)	T40426140012

LITEFOOT PRO

LITEFOOT PRO is a turf-friendly tire for subcompact and compact tractors. It features symmetrical tread blocks and broad shoulders that optimize ground contact and traction while operating on slopes. Sipes and deep grooves ensure self-cleaning, improving traction in wet and muddy conditions as well.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
12-16.5	6	40 (275)	33.6 (853)	11.9 (302)	16.5X9.75	4,180@5 (1,900@10)	T2090612165
12-16.5	10	65 (450)	33.6 (853)	11.9 (302)	16.5X9.75	6,320@5 (2,800@10)	T2091012165
23X8.50-12	6	35 (240)	22.9 (582)	8.5 (215)	12X7.00	1,470@10 (650@15)	T209062385012

LAWN BOSS

LAWN BOSS is a multi-purpose tire with a low profile and S-shaped lugs that fit a variety of machines. Its versatility and durability makes the tire a good all-around solution for professionals and consumers.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
11X4.00-5	2	TBA	TBA	TBA	TBA	TBA	T1702114005
18X8.50-8	4	22 (150)	18.2 (463)	8.7 (221)	8X7	825@10 (375@15)	T11904188508
20X10.00-8	4	22 (150)	19.8 (504)	10.2 (260)	8X8	1,200@10 (545@15)	T119042010008
20X10.00-10	4	22 (150)	20.2 (513)	10.3 (261)	10X8	1,170@10 (530@15)	T1190420100010
20X10.00-12	4	22 (150)	20.2 (512)	9.7 (246)	12X8.00	1,100@10 (500@15)	T1190420100012
20X10.00-12	10	50 (345)	20.0 (508)	10.0 (254)	12X8.00	1,800@10 (800@15)	T1191020100012
20X12.00-10	4	20 (140)	20.2 (514)	11.7 (298)	10X9.5	1,320@10 (600@15)	T1190420120010
22X9.50-10	4	20 (140)	22.2 (564)	9.3 (237)	10X7.5	1,200@10 (545@15)	T119042295010
22.5X10.00-8	4	22 (150)	22.6 (573)	10.2 (260)	8X8	1,390@10 (630@15)	T1190422510008



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
LAWN BOSS CONTINUED							
23X10.00-8	4	22 (150)	23.1 (587)	10.1 (257)	8X8	1,430@10 (650@15)	T119042310008
23X10.50-12	4	24 (165)	23.4 (593)	10.9 (276)	12X8.5	1,570@10 (710@15)	T1190423105012
24X12.00-10	4	20 (140)	24.1 (611)	12.0 (304)	10X9.5	1,710@10 (775@15)	T1190424120010
25X12.00-9	4	20 (140)	25.0 (634)	12.1 (308)	9X9.5	1,820@10 (825@15)	T119042512009
25X12.00-9	4	TBA	TBA	TBA	TBA	TBA	T25129003

ZERO-T

ZERO-T delivers an exceptional all-terrain mowing solution, whether operating on flat ground or slopes, with a unique tread pattern that will not damage grass. It enables mowers to go up to 15% faster than conventional turf tires, while making tighter turns. It's also designed to reduce shock and vibration, with superior puncture resistance as well.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
16X6.00-8	4	30 (210)	15.8 (402)	5.8 (147)	8X4.5	615@10 (280@15)	T13304166008
16X7.50-8	4	22 (150)	16.0 (406)	7.6 (193)	8X5.375	760@10 (345@15)	T13304167508
18X8.50-10	4	22 (150)	18.0 (456)	8.4 (214)	10X7	850@10 (375@15)	T133041885010
20X6.50-10	4	28 (190)	20.1 (511)	6.8 (173)	10X5.375	840@10 (375@15)	T133042065010
20X8.00-10	4	22 (150)	20.2 (512)	8.4 (212)	10X7	850@10 (375@15)	T133042080010FP
20X10.00-10	4	22 (150)	20.1 (511)	9.8 (250)	10X7	1,170@10 (530@15)	T1330420100010
22X11.00-10	4	22 (150)	22.1 (560)	11.2 (284)	10 X 8.50	1,480@10 (670@15)	T1330422110010
23X8.50-12	4	22 (150)	23.0 (583)	8.2 (208)	12X7	1,100@10 (500@15)	T133042385012
23X10.50-12	4	20 (140)	23.1 (587)	10.6 (268)	12X8.5	1,320@10 (600@15)	T1330423105012
24X8.50-12	4	22 (150)	23.9 (608)	8.5 (216)	12X7	1,280@10 (580@15)	T133042485012

Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
ZERO-T CONTINUED							
24X10.50-12	4	24 (165)	23.9 (608)	10.8 (274)	12X8.5	1,560@10 (690@15)	T1330424105012
24X12.00-10	4	22 (150)	23.9 (607)	11.8 (300)	10X8.5	1,710@10 (775@15)	T1330424120010
24X12.00-12	4	22 (150)	24.0 (610)	12.0 (305)	12X9.5	1,710@10 (775@15)	T1330424120012
26X12.00-12	4	20 (140)	26.0 (661)	12.0 (305)	12X9.5	1,760@10 (800@15)	T1330426120012

ZERO-T II

ZERO-T II is the ideal tire for zero-turn mowers operating on slopes and rough terrain, using a squared shoulder and large voids between lugs to optimize flex and ground contact for improved grip. Its tread pattern ensures safe operation while minimizing vibration, and it features a premium compound that improves puncture resistance.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
13X6.50-6	6	44 (300)	12.8 (326)	6.2 (158)	6X4.5	480@10 (218@15)	T16006136506
20X10.00-10	4	22 (150)	20.2 (512)	9.7 (247)	10X7	1,170@10 (530@15)	T1600420100010
20X8.00-10	4	24 (165)	20.1 (511)	8.2 (209)	10X7	910@10 (412@15)	T160042080010
22X11.00-10	4	22 (150)	22.0 (559)	11.2 (283)	10X8.50	1,430@10 (650@15)	T1600422110010
23X10.50-12	4	20 (140)	22.7 (576)	10.0 (255)	12X8.5	1,320@10 (600@15)	T1600423105012
24X10.50-12	4	24 (165)	23.9 (607)	10.5 (266)	12X8.5	1,650@10 (750@15)	T1600424105012
24X12.00-12	4	22 (150)	24.0 (610)	11.6 (295)	12X9.5	1,710@10 (775@15)	T1600424120012
26X12.00-12	4	20 (140)	25.9 (659)	11.8 (300)	12X9.5	1,760@10 (800@15)	T1600426120012
23X8.50-12	4	22 (150)	23.0 (583)	8.2 (208)	12X7.00	1,100@10 (500@15)	T160042385012

NDX™
The Tire That Never Goes Flat

ZERO-T II is available with OTR's exclusive, patent-pending NDX™ airless technology. See pages 44-45 for details.



REAPER

The REAPER tire is designed for use on zero-turn mowers and garden tractors. An optimized tread pattern combined with a wide footprint and proprietary rubber compound construction gives it excellent field traction, stability, and control.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50-8	4	22 (150)	17.8 (452)	8.5 (216)	8X7.00	825@10 (375@15)	T25304188508
18X8.50-10	4	22 (150)	17.8 (453)	8.3 (210)	10X7.00	825@10 (375@15)	T253041885010
18X9.50-8	4	24 (165)	17.8 (453)	9.3 (235)	8X7.00	1,040@10 (462@15)	T25304189508
20X8.00-8	4	22 (150)	19.8 (502)	8.3 (210)	8X7.00	965@10 (437@15)	T25304208008
20X8.00-8	4	TBA	TBA	TBA	TBA	TBA	T253042080008
20X10.00-8	4	22 (150)	19.8 (502)	9.7 (247)	8X7.00	1,200@10 (545@15)	T253042010008
20X10.00-10	4	22 (150)	19.8 (502)	9.7 (247)	10X7.00	1,170@10 (530@15)	T2530420100010
21X7.00-10	4	26 (180)	20.2 (513)	7.0 (177)	10X6.00	990@10 (450@15)	T253042170010
22X10.00-10	4	22 (150)	21.9 (555)	9.8 (249)	10X8.50	1,360@10 (615@15)	T2530422100010
22X10.00-10	4	22 (150)	21.7 (552)	9.5 (241)	10X8.50	1,280@10 (580@15)	T2530422100010S
22X11.00-10	4	22 (150)	21.3 (541)	10.2 (259)	10X8.50	1,280@10 (580@15)	T2530422110010
23X9.00-12	4	12 (80)	22.2 (564)	9.1 (231)	12X7.00	1,100@10 (500@15)	T253042390012
23X10.50-12	4	20 (140)	22.8 (580)	10.4 (263)	12X8.50	1,320@10 (600@15)	T2530423105012
23X11.00-12	4	20 (140)	23.1 (587)	11.1 (282)	12X8.50	1,430@10 (650@15)	T2530423110012
24X12.00-12	4	12 (80)	23.5 (597)	11.4 (289)	12X8.50	1,260@10 (560@15)	T2530424120012
26X12.00-12	4	12 (80)	26.4 (671)	11.6 (295)	12X10.50	1,390@10 (630@15)	T2530426120012

BIG BITE

BIG BITE is a turf tire that's designed for use on zero-turn, ride-on, and stand-on mowers. It features a large footprint that puts more rubber on the road for solid traction and stability. Angled tread blocks and open shoulders work together to promote self-cleaning, which boosts traction. Also, the optimized design lowers rolling resistance to protect delicate turf and grass against damage.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
16X6.50-8	4	22 (150)	15.5 (394)	6.5 (166)	8X5.375	555@10 (250@15)	T17304166508
16X8.50-8	4	22 (150)	16.1 (408)	8.4 (214)	8X7	715@10 (325@15)	T17304168508
18X6.50-8	4	13 (90)	17.4 (443)	6.3 (161)	8X5.375	495@10 (224@15)	T17304186508
18X7.00-8	2	13 (90)	17.8 (451)	7.2 (184)	8X5.375	520@10 (236@15)	T17304187008
18X8.50-8	4	TBA	17.7 (450)	8.4 (213)	8X7.00	520@10 (236@15)	T17304188508
18X8.50-10	4	22 (150)	17.4 (441)	8.2 (207)	10X7	780@10 (345@15)	T173041885010
18X10.50-8	4	10 (70)	17.8 (453)	10.2 (260)	8.50X8	680@10 (307@15)	T173041810508
18X10.50-10	4	22 (150)	17.8 (452)	10.0 (255)	10X8.5	990@10 (450@15)	T1730418105010
20X6.50-10	4	28 (190)	18.7 (474)	7.0 (178)	10X6	840@10 (375@15)	T173042065010
20X8.00-10	4	13 (90)	19.2 (487)	8.0 (204)	10X7	850@10 (375@15)	T173042080010
20X10.00-10	4	22 (150)	19.1 (486)	9.4 (239)	10X8	1,170@10 (530@15)	T1730420100010
20X12.00-10	4	13 (90)	19.6 (498)	11.0 (280)	10X8.5	1,320@10 (600@15)	T1730420120010
22X9.50-10	4	12 (80)	20.5 (521)	9.7 (246)	10X7.5	1,200@10 (545@15)	T173042295010
22X11.00-10	4	12 (80)	20.9 (532)	11.1 (281)	10X8.5	1,395@10 (630@15)	T1730422110010
23X11.00-10	4	12 (80)	21.6 (549)	11.3 (288)	10X8.5	1,480@10 (670@15)	T1730423110010
23X9.50-10	4	20 (140)	21.3 (541)	9.8 (249)	10X7.50	1,230@10 (560@15)	T173042395010
24X9.50-12	4	24 (165)	23.6 (599)	9.3 (237)	12X7	1,480@10 (670@15)	T173042495012
24X12.00-12	4	20 (140)	23.3 (591)	12.0 (304)	12X10.5	1,710@10 (775@15)	T1730424120012



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
BIG BITE CONTINUED							
25X10.00-12	6	24 (165)	25.1 (638)	10.1 (257)	12X8.5	1,170@40 (530@65)	T1730625100012
26X12.00-12	6	30 (210)	25.1 (637)	12.4 (316)	12X10.5	1,760@10 (800@15)	T1730626120012

HK45

HK45 is an all-purpose, non-directional tire featuring a unique geometric lug design that achieves excellent balance between traction—straight line and cornering—and handling on flat and sloped ground. Its sidewalls are reinforced for puncture-resistance and durability.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X11.00-10	4	22 (150)	17.7 (450)	9.5 (241)	10X8.5	1,100@10 (500@15)	T24450418110010

TR-34

The TR-34 turf tire is designed for use on farm tractors and ride-on mowers. It features a tight, non-directional tread pattern to optimize traction, tread wear, and ride comfort, while also optimizing performance in a wide range of conditions.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
16X7.50-8	6	38 (260)	15.9 (404)	7.1 (180)	8X5.375	880@10 (400@15)	T25006167508
18X8.50-10	6	32 (220)	17.9 (454)	8.1 (206)	10 X 7.00	935@10 (425@15)	T250061885010
24X12.00-12	6	32 (220)	24.1 (611)	12.0 (305)	12X10.50	2,040@20 (925@30)	T2500624120012
26X12.00-12	6	30 (210)	25.8 (655)	12.1 (306)	12X10.5	2,270@10 (1,030@15)	T2500626120012

WORKBOSS® CT

The WORKBOSS CT is designed for compact tractors, with every detail of the tread, sidewall, and profile engineered for optimal performance. Industry-leading ply ratings allow operators and OEMs to easily match the right tire to the machine. This tire delivers a quieter ride and greater stability under load.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
16X7.50-8	6	38 (260)	16.0 (406)	7.4 (188)	8X5.50	785@13 (355@20)	T-104035
18X8.50-10	8	46 (320)	17.8 (452)	8.3 (211)	10X7.00 AT	1,140@10 (515@15)	T-103851
23X8.50-12	6	36 (250)	22.8 (578)	8.4 (214)	12X7.00 JA	1,520@13 (690@20)	T-103227
24X12.00-12	6	32 (220)	24.0 (610)	12.0 (305)	12X10.50	2,040@13 (925@20)	T-104012
25X8.50-14	6	36 (250)	25.2 (640)	8.2 (208)	14X7.00	1,610@13 (730@20)	T-104046
26X12.00-12	8	42 (290)	26.0 (660)	11.9 (302)	12X10.50 AT	2,705@13 (1,215@20)	T-103817
27X8.50-15	8	44 (300)	26.9 (683)	8.6 (218)	15X7.00	2,150@13 (975@20)	T-104051
10-16.5	6	30 (210)	30.5 (775)	10.2 (259)	16.5X8.25	2,270@13 (1,030@20)	T-104001
12-16.5	6	42 (290)	32.7 (831)	12.1 (307)	16.5X9.75	4,180@5 (1,900@10)	T-103236
14-17.5	6	32 (220)	36.3 (922)	13.7 (348)	17.5X10.50	4,800@5 (2,180@10)	T-103239
14.9-24	8	30 (210)	49.3 (1,252)	15.1 (384)	24XW12	6,950@13 (3,150@20)	T-104057
15-19.5	6	30 (210)	40.3 (1,024)	15.3 (389)	19.5X11.75	4,180@13 (1,900@20)	T-104052
43X16.00-20	6	30 (210)	43.1 (1,095)	15.9 (404)	20XW13L	5,680@13 (2,575@20)	T-104056
16.9-24	6	30 (210)	51.7 (1,313)	17.0 (432)	24XW13L	8,250@13 (3,750@20)	T-104067



ULTRA CHEVRON

ULTRA CHEVRON is a premium non-directional tire with ply ratings of 4, 6, and 12 for heavy-duty turf applications. Its high-quality construction ensures excellent durability and long tread life, featuring square shoulders that improve handling and grip—the ideal solution for a wide range of equipment.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)		LBS@MPH (KG@KM/H)	
24X13.00-12	4	18 (125)	22.7 (576)	12.9 (327)	12 X 10.50	1,730@10 (775@15)	T560424130012
24X13.00-12	6	28 (190)	22.7 (576)	12.9 (327)	12 X 10.50	2,270 @10 (1,030@15)	T560624130012
26X12.00-14	6	32 (220)	26.0 (661)	12.3 (312)	14 X 9.50	2,470@10 (1,120@15)	T560626120014
26X12.00-14	6	TBA	TBA	TBA	TBA	TBA	T560626120014P
26.5X14.00-12	4	18 (125)	26.4 (671)	14.2 (360)	12 X 10.50	2,170@10 (975@15)	T5604265140012
26.5X14.00-12	6	TBA	TBA	TBA	TBA	TBA	T5606265140012
29X14.00-15	4	18 (125)	28.9 (734)	13.9 (353)	15 X 12.00	2,400@10 (1,090@15)	T560429140015
29X14.00-15	12	75 (520)	29.3 (745)	13.9 (353)	15 X 12.00	5,520@10 (2,500@15)	T561229140015
26.5X14.00-12	6	TBA	TBA	TBA	TBA	TBA	T26514002

CHEVRON

CHEVRON is a non-directional tire with a proven tread pattern that is well suited for smaller equipment, providing good traction, stability, durability, and value for the money. It's an excellent utility tire for residential turf care.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)		LBS@MPH (KG@KM/H)	
13X5.00-6	4	22 (150)	12.7 (323)	4.7 (119)	6X3.5	440@10 (200@15)	T5604135006
13X6.50-6	4	28 (190)	13.3 (337)	6.3 (160)	6X4.5	480@10 (218@15)	T5604136506
18X8.50-8	4	22 (150)	17.6 (448)	8.4 (213)	8X7	825@10 (375@15)	T5604188508

CHEVRON II

CHEVRON II is a non-directional tire with a tapered shoulder that enhances grip, especially on slopes. It's a step up from our Chevron tire, offering improved traction for professional turf care. It's also durable with a long-lasting tread.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
11X4.00-4	4	46 (320)	11.3 (288)	3.9 (100)	4X3	340@10 (155@15)	T10104114004
15X6.00-6	4	30 (210)	14.7 (372)	6.3 (159)	6X4.5	565@10 (257@15)	T10104156006
16X6.50-8	4	28 (190)	15.8 (402)	6.4 (164)	8X5.375	615@10 (280@15)	T10104166508
16X7.50-8	4	24 (165)	16.6 (421)	7.1 (179)	8X5.375	675@10 (307@15)	T10104167508
18X6.50-8	4	28 (190)	17.9 (454)	7.2 (182)	8X5.5	770@10 (345@15)	T10104186508
18X8.50-8	4	22 (150)	17.8 (451)	8.3 (210)	8X7	825@10 (375@15)	T10104188508
18X9.50-8	4	24 (165)	17.9 (455)	9.3 (235)	8X7	935@10 (425@15)	T10104189508
20X8.00-8	4	22 (150)	19.9 (505)	10.0 (253)	8X7	1,200@10 (545@15)	T10104208008
20X8.00-8	4	TBA	TBA	TBA	TBA	TBA	T2088003
20X8.00-10	4	24 (165)	20.0 (508)	7.9 (201)	10X6	850@10 (375@15)	T101042080010
20X10.00-8	4	22 (150)	19.9 (505)	9.8 (250)	8X8	1,200@10 (545@15)	T101042010008
20X10.00-10	4	24 (165)	20.0 (508)	7.9 (201)	10X7	935@10 (425@15)	T1010420100010



SOFT FOOT

SOFT FOOT is a turf tire featuring a less aggressive tread with diagonal low-profile lugs on the inside of the tire. Its smooth outer surface area and sharp radius on the shoulder improves grip. It's designed to maximize ground contact with minimal damage to grass, especially when used in residential applications.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
24X13.00-12	4	18 (125)	24.0 (609)	12.5 (318)	12X10.5	1,730@10 (775@15)	T1050424130012

GARDEN MASTER


GARDEN MASTER is a multi-purpose tire for turf equipment operating in a variety of conditions, including sand and soft- or hard-pack soils. It's a directional tire with an R4 pattern and lug design that improves traction on hard and soft surfaces. It's self-cleaning with a herringbone lug design that ejects mud and debris.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN (MM)	LBS@MPH (KG@KM/H)	
18X8.50-10	4	22 (150)	17.6 (448)	8.2 (209)	10X7	780@10 (345@15)	T99041885010-S
18X8.50-10	4	22 (150)	17.9 (453)	8.3 (211)	10X7.00	785@10 (355@15)	T99041885010
18X8.50-10	6	TBA	TBA	TBA	TBA	TBA	T99061885010
18X8.50-10	8	44 (300)	17.9 (453)	8.3 (211)	10X7.00	1,230@10 (560@15)	T99081885010
26X12.00-12	4	20 (140)	25.8 (654)	12.0 (305)	12X10.5	1,760@10 (800@15)	T990426120012-S
26X12.00-12	4	20 (140)	26.0 (660)	12.0 (305)	12X10.5	1,760@10 (800@15)	T990426120012
26X12.00-12	8	TBA	TBA	TBA	TBA	TBA	T990826120012

LAWN TRAC

LAWN TRAC provides an open, deep lug design with large footprint that maximizes ground contact for better grip—an excellent all-around solution for operating in muddy fields or on hills. It's self-cleaning with lugs designed to eject mud and debris away from the tire, so there is no slowing down.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
16X7.50-8	4	28 (190)	16.0 (406)	7.5 (191)	8X5.38	710@10 (315@15)	T10004167508
16X7.50-8	6	38 (260)	16.0 (406)	7.5 (191)	8X5.38	710@10 (315@15)	T10006167508
18X8.50-8	4	22 (150)	17.7 (450)	8.4 (213)	8X7.00	825@10 (375@15)	T10004188508
18X8.50-10	4	22 (150)	17.7 (450)	8.1 (206)	10X7.00	780@10 (345@15)	T100041885010
18X8.50-10	6	32 (220)	17.7 (450)	8.1 (206)	TBA	1,050@10 (475@15)	T100061885010
18X8.50-10	8	32 (220)	17.9 (453)	8.1 (206)	10X7.00	1,100@10 (500@15)	T100081885010
23X8.50-12	12	90 (620)	22.6 (575)	8.6 (218)	12X7	2,680@10 (1,215@15)	T100122385012P
23X10.50-12	4	20 (140)	22.8 (579)	10.5 (267)	12X8.50	1,320@10 (600@15)	T1000423105012
23X10.50-12	6	32 (220)	23.0 (584)	10.5 (267)	TBA	1,760@10 (800@15)	T1000623105012
24X12.00-12	4	20 (140)	23.9 (608)	12.1 (308)	12X10.50	1,710@10 (775@15)	T1000424120012
26X10.00-12	4	22 (150)	25.9 (657)	10.3 (261)	12X8.50	1,710@10 (775@15)	T1000426100012
26X12.00-12	4	20 (140)	26.0 (660)	12.3 (312)	12X10.50	1,760@10 (800@15)	T1000426120012
26X12.00-12	8	20 (140)	26.2 (665)	12.3 (312)	12X10.5	1,760@10 (800@15)	T261212025
26X12.00-12	8	TBA	TBA	TBA	TBA	TBA	T1000826120012



22 MAG

22 MAG features a smooth bar tread to enhance traction, especially on rough terrain, as well as wet and muddy conditions. It also provides more load-bearing capacity for vehicles and machines doing heavy-duty jobs.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
20X8.00-10	4	22 (150)	19.7 (501)	7.8 (197)	10 X 6.00 AT	880@10 (400@15)	T2404222080010
21X11.00-8	4	22 (150)	21.2 (538)	10.9 (277)	10 X 8.50	1,390@10 (630@15)	T2404222111008
22X11.00-10	4	22 (150)	21.9 (555)	11.1 (281)	10 X 8.50	1,480@10 (670@15)	T24042222110010
22.5X11.00-10	4	22 (150)	22.2 (563)	10.8 (274)	10 X 8.50	1,430@10 (650@15)	T240422225110010
23X10.50-12	4	20 (140)	23.3 (592)	10.7 (271)	12 X 8.50	1,310@10 (580@15)	T24042223105012
24X12.00-12	4	20 (140)	24.4 (619)	12.3 (312)	12 X 9.50 AT	1,710@10 (775@15)	T24042224120012

XT-41

XT-41 is a game-changing “hybrid” tire blending R4 and R1 tread patterns for maximum flexibility when operating on- or off-road. Its high tread-to-void ratio improves wear when driving on asphalt with an overlapping centerline tread design for improved ride comfort. It also features rock ejectors in between lugs to ensure high performance when operating turf equipment in wet or muddy conditions. (This tire also works in UTV and agricultural applications.)



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50-10	4	22 (150)	17.9 (455)	7.9 (200)	10X7	780@10 (345@15)	T198041885010
18X8.50-10	6	32 (220)	17.8 (452)	8.0 (203)	10X7.00	1,050@10 (475@15)	T198061885010
18X8.50-10	8	44 (300)	17.8 (452)	8.0 (203)	10X7.00	1,230@10 (560@15)	T198081885010
26X12.00-12	4	20 (140)	26.1 (662)	11.8 (301)	12X10.5	1,760@10 (800@15)	T1980426120012
26X12.00-12	8	42 (290)	26.0 (660)	12.0 (305)	12X10.50	3,000@10 (1,360@15)	T1980826120012

FIELD MASTER

FIELD MASTER provides a more aggressive tread with angled lugs to enhance grip on rough terrain. It's wide stance and reinforced casing ensure stability and durability, providing a flexible solution for applications such as heavy-duty turf and agriculture, delivering a good overall value.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
4.80/4.00-8	4	42 (290)	17.0 (432)	4.3 (110)	8X3	500@5 (224@10)	T188044804008
4.80X4.00-8	4	TBA	TBA	TBA	TBA	TBA	T48048003
13X5.00-6	4	20 (140)	13.0 (330)	4.7 (118)	6X3.25	440@10 (200@15)	T1356016
16X6.50-8	6	TBA	TBA	TBA	TBA	TBA	T16658011
18X9.50-8	2	TBA	TBA	TBA	TBA	TBA	T189508014
18X9.50-8	4	TBA	TBA	TBA	TBA	TBA	T189508016
20X10.00-8	4	TBA	TBA	TBA	TBA	TBA	T20108007
21X11.00-10	4	TBA	TBA	TBA	TBA	TBA	T1040421110010
23X10.50-12	6	TBA	TBA	TBA	TBA	TBA	T23105012011
26X12.00-12	4	TBA	TBA	TBA	TBA	TBA	T261212002
26X12.00-12	4	TBA	TBA	TBA	TBA	TBA	T261212015
26X12.00-12	8	50 (345)	26.2 (665)	12.8 (665)	12X10.50	3,020@10 (1,360@15)	T1040826120012



ROUGH TAMER

ROUGH TAMER provides an aggressive tread and unique lug pattern designed to ensure grip and traction. Ground contact is evenly dispersed to protect grass.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
4.10/3.50-4	2	TBA	TBA	TBA	4X2.25	340@10 (155@15)	T116024103504
4.10/3.50-4	4	TBA	TBA	TBA	4X2.25	340@10 (155@15)	T116044103504
4.10/3.50-4	4	TBA	TBA	TBA	TBA	TBA	T4103504005
4.10/3.50-5	2	TBA	TBA	TBA	5X2.25	340@10 (155@15)	T116024103505
4.10/3.50-5	4	TBA	TBA	TBA	5X2.25	340@10 (155@15)	T116044103505
4.10/3.50-6	2	TBA	TBA	TBA	6X2.25	290@10 (132@15)	T116024103506
4.10/3.50-6	4	TBA	TBA	TBA	6X2.25	290@10 (132@15)	T116044103506
4.80/4.00-8	4	42 (290)	16.6 (422)	4.7 (118)	8X2.5	500@5 (224@10)	T116044804008
16X6.50-8	2	TBA	TBA	TBA	8X5.375	615@10 (280@15)	T11602166508
16X6.50-8	4	TBA	TBA	TBA	8X5.375	615@10 (280@15)	T11604166508

SAWTOOTH

SAWTOOTH features a tread pattern that improves traction whether operating in front- or rear-wheel drive. It's a good solution for residential use and for vehicles operating inside or outside.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
4.10/3.50-4	2	TBA	TBA	TBA	TBA	TBA	T66024103504
4.10/3.50-4	TBA	TBA	TBA	TBA	TBA	TBA	T66044103504
4.10/3.50-4	4	TBA	TBA	TBA	TBA	TBA	T4103504004
4.10/3.50-6	4	50 (345)	12.8 (325)	3.9 (99)	6X3.25	445@10 (200@15)	T60644103506
22X11.00-10	TBA	TBA	TBA	TBA	TBA	TBA	T24350422110010

SMOOTH

SMOOTH is wide tire with exceptional ground contact for improved stability and maneuverability with no risk of damaging lawns. Sidewall construction is robust, enhancing puncture resistance and long life.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
4.10/3.50-4	4	30 (210)	10.6 (270)	3.9 (100)	4X2.25	340@10 (155@15)	T55044103504
9X3.50-4	4	50 (345)	8.9 (227)	3.6 (92)	4X2.75	TBA	T550493504
9X5.00-5	4	29 (200)	9.1 (232)	4.1 (105)	5X3	155@10 (69@15)	T550495005
11X4.00-5	4	48 (330)	11.0 (279)	4.1 (104)	5X3	340@10 (155@15)	T5504114005
11X5.00-5	4	46 (320)	11.1 (283)	4.5 (115)	5X3	355@10 (160@15)	T5504115005
11X6.00-5	4	29 (200)	10.9 (278)	5.2 (132)	5X3	430@10 (195@15)	T5504116005
13X5.00-6	4	40 (275)	12.8 (325)	4.9 (123)	6X3.25	440@10 (200@15)	T5504135006



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
SMOOTH CONTINUED							
13X6.50-6	4	28 (190)	13.0 (330)	6.2 (158)	6X5	460@10 (206@15)	T5504136506
13X8.00-6	4	22 (150)	12.8 (326)	8.0 (202)	7X6	495@15 (224@25)	T5504138006
15X6.00-6	4	52 (360)	14.8 (376)	6.3 (160)	6X4.5	565@10 (257@15)	T5504156006
15X6.00-6	8	52 (360)	14.8 (376)	6.3 (160)	6X4.5	565@10 (257@15)	T5508156006
16X6.50-8	4	28 (190)	16.2 (411)	6.6 (167)	8X5.375	615@10 (280@15)	T5504166508
16X8.50-8	8	44 (300)	16.1 (408)	8.4 (214)	8X7.00	TBA	T5508168508
18X9.50-8	4	22 (150)	17.7 (450)	8.8 (224)	8X7	935@10 (425@15)	T5504189508
18X10.50-8	4	22 (150)	18.6 (472)	9.9 (251)	8X8	990@10 (450@15)	T55041810508
18X10.50-10	4	22 (150)	18.9 (479)	9.9 (252)	10X8.5	990@10 (450@15)	T550418105010
20X10.00-10	2	12 (80)	19.5 (495)	9.8 (249)	10X8.5	815@10 (365@15)	T550220100010
22X10.00-14	4	22 (150)	22.1 (561)	9.8 (249)	10 X 8.50	1,230@10 (560@15)	T550422100014
22X12.00-12	4	20 (140)	22.2 (563)	11.5 (291)	12X8.50	1,480@10 (670@15)	T550422120012

FLEX SMOOTH

FLEX SMOOTH is a heavy-duty semi-pneumatic tire designed to minimize turf damage. It features a wide contact patch and smooth tread for stability and reduced vibration. Crowned versions improve grip on gentle slopes as well.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
8X3.00-4	N/A	N/A	8.4 (214)	3.0 (76)	4X2.25	150@10 (67@15)	TSPS83004
8X3.00-4	N/A	N/A	TBA	TBA	TBA	TBA	T83004001
9X3.50-4	N/A	N/A	9.1 (230)	3.2 (82)	4X2.25	260@10 (118@15)	TSPS93504225
9X3.50-4	N/A	N/A	TBA	TBA	TBA	TBA	T9350002
11X4.00-5	N/A	N/A	TBA	TBA	5X3.25	325@10 (145@15)	TSPS114005
11X4.00-5	N/A	N/A	TBA	TBA	TBA	TBA	T1145004
11X4.00-5	N/A	N/A	TBA	TBA	TBA	TBA	T1145007
11X6.00-5	N/A	N/A	11.4 (290)	5.1 (130)	5X3	365@10 (165@15)	TSPS116005
13X5.00-6	N/A	N/A	12.4 (314)	4.7 (119)	6X3.25	460@10 (206@15)	TSPS135006325
13X5.00-6	N/A	N/A	TBA	TBA	TBA	TBA	T1356006
13X6.50-6	N/A	N/A	12.6 (321)	5.8 (147)	6X4.5	440@10 (200@15)	TSPS136506450
13X6.50-6	N/A	N/A	12.7 (322)	5.8 (146)	6X4.5	440@10 (200@15)	TSPSC136506450
13X6.50-6	N/A	N/A	TBA	TBA	TBA	TBA	T13656006
15X6.00-6	N/A	N/A	14.1 (359)	5.8 (148)	6X4.5	570@10 (257@15)	TSPS156006450
15X6.00-6	N/A	N/A	14.2 (360)	5.8 (148)	6X4.5	570@10 (257@15)	TSPS156006R
15X6.00-6	N/A	N/A	TBA	TBA	TBA	TBA	T1566004
15X6.00-6	N/A	N/A	TBA	TBA	TBA	TBA	TSPR156006450
15X6.50-8	N/A	N/A	15.0 (380)	5.9 (150)	8X4.5	260@10 (118@15)	TSPS156508
15X6.50-8	N/A	N/A	15.0 (380)	5.9 (150)	8X4.5	330@10 (150@15)	TSPSC156508



RIB

RIB is a grooved tire with excellent traction and durability designed for a wide range of turf applications, including rotary cutters. Its circumferential ribs and broad shoulders enhance operation in wet conditions with a low-impact design that minimizes turf damage.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
11X4.00-5	4	46 (320)	10.7 (272)	4.2 (107)	5X3	210@10 (95@15)	T1504114005
13X5.00-6	4	40 (275)	12.7 (323)	4.7 (119)	6X3.5	440@10 (200@15)	T1504135006
13X6.50-6	4	28 (190)	13.0 (330)	6.4 (163)	6X4.5	480@10 (218@15)	T1504136506
13X6.50-6	4	TBA	TBA	TBA	TBA	TBA	T13656002
15X6.00-6	4	30 (210)	14.7 (372)	6.1 (155)	6X4.5	565@10 (257@15)	T1504156006
16X6.50-8	4	28 (190)	16.1 (409)	6.5 (166)	8X5.375	615@10 (280@15)	T6204166508
18X9.50-8	4	24 (165)	17.4 (443)	9.4 (239)	8X7	935@10 (425@15)	T6204189508
20X10.00-10	4	22 (150)	19.6 (498)	9.5 (240)	10X8	1,170@10 (530@15)	T150420100010
13X6.50-6	4	28 (190)	13.0 (331)	5.2 (131)	6X4.5	480@10 (218@15)	T1504136506J
13X6.50-6	4	15 (100)	12.6 (319)	5.8 (147)	6X4.5	480@10 (218@15)	T11004136506
18X8.50-8	4	TBA	TBA	TBA	TBA	TBA	T6204188508
18X9.50-8	4	TBA	17.4 (443)	9.4 (239)	8X7	935@10 (425@15)	T7904189508
23X10.50-14	6	36 (250)	23.0 (583)	10.7 (272)	14X8.5	1,870@10 (850@15)	T150623105014

SEMI PNEUMATIC FLEX RIB

SEMI PNEUMATIC FLEX RIB is a semi-pneumatic tire with a ribbed tread and robust construction that delivers excellent traction and ride comfort. It's a good all-around tire for smaller equipment used in residential turf care, plus it's maintenance-free (no air required).



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
8X2.5-4	N/A	N/A	8.0 (203)	2.5 (64)	4X2.25	125@5 (56@10)	4124192
11X4.00-5	N/A	N/A	TBA	TBA	TBA	TBA	483855
13X6.50-6	N/A	N/A	12.8 (325)	5.3 (135)	6X4.5	440@10 (200@15)	TSPRD136506
13X6.50-6	N/A	N/A	TBA	TBA	TBA	TBA	483866
13X6.50-6	N/A	N/A	12.9 (326)	5.2 (133)	6X4.5	440@10 (200@15)	TSPR136506450
15X6.00-6	N/A	N/A	14.1 (357)	6.0 (151)	6X4.5	570@10 (257@15)	TSPR156006R
15X6.00-6	N/A	N/A	14.1 (357)	6.0 (151)	6X4.5	570@10 (257@15)	TSPR156006
15X6.00-6	N/A	N/A	TBA	TBA	TBA	TBA	TSPR156006450



Semi-pneumatic tires provide a maintenance-free solution. They use a solid rubber core with a hollow air pocket running through the center of the tire; there are no tubes or valve stems. In addition to being cost-effective, these tires provide a smooth ride. Plus, OTR's tires are constructed with tight tolerancing to ensure a "lock-fit" with the wheel.



BUSHMASTER RIB

OTR's BUSHMASTER RIB tire and wheel system offers excellent traction and durability, ideal for a wide range of all brush and land clearing applications, such as rotary cutters. Its circumferential ribs and broad shoulder enhance operation in wet conditions. The wheels are corrosion resistant and designed to withstand shock, vibration and exposure to extreme weather.



Tire Size	Replaces Aircraft Size	Ply	Overall Di- ameter	Section Width	Rim Size	Foam Capacity	Part Number
			IN (MM)	IN (MM)	IN	LBS	
21X7.00-12	22 X 6.60-10	16	21.4 (543)	7.2 (182)	12X5 12X5.5	35	T125162170012TL
24X8.00-14	24 X 7.70-10	20	24.3 (616)	7.9 (201)	14X6	56	T125202480014
25X7.00-18	TBA	8	TBA	TBA	TBA	TBA	T25718008
26X9.00-14.5	28 X 9.00-12	16	26.6 (675)	8.9 (227)	14.5X6	79	T1252426900145
27X8.00-18	29 X 9.00-15	8	26.9 (684)	7.9 (201)	18X6	55	T125082780018TL
27X8.00-18	29 X 9.00-15	12	26.9 (684)	7.9 (201)	18X6	55	T125122780018

ASSEMBLY INFORMATION

Tire Size	Wheel Size	BOLT HOLES	Wheel Color	Fill Type	Wheel Part Number	Tire Part Number	Assembly Part Number
21X7.00-12	12X5	5	BLACK	AIRFILL	W125002	T125162170012TL	A-102853
21X7.00-12	12X5.5	4	JD YELLOW	AIRFILL	W1255004	T125162170012TL	A-102851
21X7.00-12	12X5	4	JD YELLOW	FOAMFILL	1205002572	T125162170012TL	A-102849
21X7.00-12	12X5	5	BLACK	FOAMFILL	W125002	T125162170012TL	A-102852
24X8.00-14	14X6	5	BLACK	AIRFILL	W146002	T125202480014	14060100901
24X8.00-14	14X6	5	BLACK	FOAMFILL	W146002	T125202480014	TA140600141101
26X9.00-14.5	14.5X6	4	BLACK	FOAMFILL	W1456001	T1252426900145	TA145600141101
26X9.00-14.5	14.5X6	5	JD YELLOW	FOAMFILL	1456002572	T1252426900145	TA145600257201
25X7.00-18	18X6	5	BLACK	FOAMFILL	W186004	T25718008	TA25718005
27X8.00-18	18X6	5	BLACK	AIRFILL	W186004	T125082780018TL	101362

350 MAG

350 MAG is an industry-leading all-around tire, ideal for turf, ATV, or utility vehicle applications. Its open, non-directional tread pattern and distinctive diamond-shaped shoulder lugs optimize handling and grip, providing exceptional performance. It is capable of handling heavier loads, while providing a comfortable ride, making this a preferred premium tire.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50-8	6	30 (210)	17.6 (448)	8.5 (216)	8X7	1,170@10 (530@15)	T243506188508
18X8.50-10	4	TBA	18.1 (459)	8.1 (205)	10X7.00	825@10 (375@15)	T2435041885010
18X8.50-10	6	TBA	18.1 (459)	8.1 (205)	10X7	825@10 (375@15)	T2435061885010
18X9.50-8	6	34 (235)	18.3 (464)	8.9 (227)	8X7	1,050@10 (475@15)	T243506189508
18X10.50-10	6	36 (250)	18.4 (467)	9.9 (252)	10X8.5	1,390@10 (630@15)	T24350618105010
20X10.00-8	4	22 (150)	19.7 (500)	10.0 (255)	8X7	1,200@10 (545@15)	T2435042010008
20X8.00-10	6	34 (235)	19.6 (498)	7.7 (195)	10X6.5	1,200@10 (545@15)	T2435062080010
20X10.00-10	6	32 (220)	19.6 (497)	9.1 (232)	10X8	1,430@10 (650@15)	T24350620100010
23X10.50-12	4	TBA	TBA	TBA	TBA	TBA	T24350423105012
23X10.50-12	6	22 (150)	22.9 (582)	10.3 (262)	12X8.5	1,390@10 (630@15)	T24350623105012
23X10.50-14	4	36 (250)	TBA	TBA	14X8.5	1,330@10 (600@15)	T24350423105014
23X10.50-14	6	36 (250)	TBA	TBA	14X8.5	1,330@10 (600@15)	T24350623105014

ASSEMBLY INFORMATION

Size	Wheel Type	Wheel Color	Wheel Part Number	Tire Part Number	Assembly Part Number
22X11.00-10	STEEL	BLACK	10070515	T24350422110010*	OTR4
22X11.00-10	ALUMINUM	BLACK	1007009	T24350422110010*	OTR13
23X10.50-12	ALUMINUM	SILVER	1207026CH	T24350423105012*	OTR5
23X10.50-12	ALUMINUM	BLACK	1207026BK	T24350423105012*	OTR6
23X10.50-14	ALUMINUM	BLACK	1407011	T24350423105014*	OTR3

*DOT APPROVED



350 MAG is an industry-recognized tire used by leading OEMs. It's a premium tire in terms of durability, ride comfort, long life, and load-bearing capacity.

“ I have had my Kioti Mechron since 2015. I use it every day to do all my chores on my property. The OTR 350 MAG has been just terrific, in all conditions—2 wheel, 4 wheel, diff lock—I've done it all. They have worn well with plenty of tread left and have never had any kind of issues. **”**

– Matt Ivey, Cowlitz River Rigging-Kioti Tractor



FAIRWAY MASTER

FAIRWAY MASTER combines a unique tread pattern and rugged construction for a smooth ride with durability — ideal for golf and utility vehicles, whether driving on turf or asphalt. It features a gently squared shoulder that enhances grip on slopes with no damage to grass.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
205/50-10	4	30 (210)	18.4 (468)	7.8 (199)	10X6	675@10 (307@15)	T117042055010
225/35-12	4	30 (210)	18.6 (473)	8.1 (205)	10 X 8.50	750@10 (335@15)	T117042253512
205/50-10	6	TBA	TBA	TBA	TBA	TBA	T2055010002

ASSEMBLY INFORMATION

Size	Wheel Type	Wheel Color	Wheel Part Number	Tire Part Number	Assembly Part Number
205/50-10	ALUMINUM	BLACK	1007009	T117042055010*	OTR1
205/50-10	STEEL	BLACK	1070515	T117042055010*	OTR2
225/35-12	ALUMINUM	SILVER	1207026CH	T117042253512*	OTR11
225/35-12	ALUMINUM	BLACK	1207026BK	T117042253512*	OTR12

*DOT APPROVED



The FAIRWAY MASTER is one of the best riding tires we have used. Specifically designed for today's cart market, it has low vibration, low noise, and wears as well or better than any tire on the market. From tire to tire, the FAIRWAY MASTER is consistent with all these traits.

– Gadsden Golf Carts



PROWLER

PROWLER is OTR's premium turf-friendly tire. Its unique siped lugs with a continuous flat center-tread element provide excellent traction on wet turf, while reducing wear on asphalt. (It's popular for UTV and worksite applications as well.)



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
23X10.50-12	4	20 (140)	22.7 (577)	10.3 (261)	12X8.5	1,320@10 (600@15)	T1550423105012
23X10.50-14	4	24 (165)	22.9 (581)	10.2 (260)	14X8	1,480@10 (670@15)	T1550423105014*
25X10.00-12	6	32 (220)	25.0 (634)	9.9 (251)	12X8.5	1,980@10 (900@15)	T1550625100012H

ASSEMBLY INFORMATION

Size	Wheel Type	Wheel Color	Wheel Part Number	Tire Part Number	Assembly Part Number
23X10.50-12	ALUMINUM	SILVER	1207026BK	T1550423105012	OTR21
23X10.50-12	ALUMINUM	BLACK	1207026CH	T1550423105012	OTR22
23X10.50-14	ALUMINUM	BLACK	1407011	T1550423104014*	OTR23

*DOT APPROVED

PROWLER is our most popular tire for golf carts, featuring a unique OTR tread design that sets it apart from off-the-shelf replacements.





TEE MASTER

TEE MASTER is a radial golf tire designed for low rolling resistance, which in turn extends battery life. Its flat profile ensures excellent traction and stability with less noise on hard surfaces—an ideal solution for golf carts used in residential areas.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50R8	4	22 (150)	17.7 (450)	8.7 (220)	8X7	825@10 (375@15)	T1560418850R8*
205/40R14	4	22 (150)	20.6 (523)	7.9 (201)	14X7	880@10 (400@15)	T1560420540R14*
205/40R14	4	22 (150)	20.8 (528)	7.8 (198)	14X7	880@10 (400@15)	T2270420540R14
205/65R10	4	22 (150)	20.8 (528)	7.9 (201)	10X6	990@10 (450@15)	T2270420565R10
205/65R10	4	22 (150)	20.7 (525)	7.9 (201)	10X6	990@10 (450@15)	T1560420565R10*
215/35R12	4	24 (165)	18.7 (475)	8.2 (209)	12X7	880@10 (400@15)	T1560421535R12*

ASSEMBLY INFORMATION

Size	Wheel Type	Wheel Color	Wheel Part Number	Tire Part Number	Assembly Part Number
205/40R14	ALUMINUM	BLACK	1407011	T1560420540R14*	OTR19
205/65R10	ALUMINUM	BLACK	1007009	T1560420565R10*	OTR15
205/65R10	ALUMINUM	SILVER	1007009CH	T1560420565R10*	OTR16
215/35R12	ALUMINUM	BLACK	1207026BK	T1560421535R12*	OTR17
215/35R12	ALUMINUM	SILVER	1207026CH	T1560421535R12*	OTR18
18X8.50-8	STEEL	WHITE	219823101	T1560418850R8*	OTR20

*DOT APPROVED



The TEE MASTER radial has the absolute smoothest ride of any tire I've seen introduced to the golf market in the last ten years. The key, I believe, to its success was extended testing and R&D in its unique build structure. I've yet to have one complaint from a customer about noise, vibration, or unusual wear characteristics. If there is any tire I would endorse and put me and family on board with, it would be the TEE MASTER.

– Eric Huth – Sales Manager, Augusta Golf Cars - AGC



GC

GC is a non-directional tire with a wide footprint, reinforced sidewall, and tread pattern for stability and durability. It's competitively priced, delivering more value.



Tire Size	Ply	Rated Pressure	Overall Diameter	Section Width	Rim Size	Load Capacity	Part Number
		PSI (KPA)	IN (MM)	IN (MM)	IN	LBS@MPH (KG@KM/H)	
18X8.50-8	4	22 (150)	17.7 (450)	8.4 (213)	8X7	825@10 (375@15)	T5094188508

ASSEMBLY INFORMATION

Size	Wheel Type	Wheel Color	Wheel Part Number	Tire Part Number	Assembly Part Number
18X8.50-8	STEEL	WHITE	219823101	T5094188508*	501240-C

*DOT APPROVED



Tubes



TRANS AMERICAN RUBBER



OTR's TRANS AMERICAN RUBBER tubes feature 100% butyl rubber for a premium tube solution. Tubes extend tire life, prevent air leakage, and add weight for improved traction. Butyl provides distinct advantages for turf equipment:


- Improved shock absorption and ride comfort.
- Excellent weatherability; resistant to heat, moisture, and chemical attack.
- Durability; resistant to flexing, abrasion, and tearing.

Tube Size	Valve	Box Quantity	Type	Part Number
2.80/2.50-4	TR-87	20	BIAS	9B01NB
4.10/3.50-4	TR-13	20	BIAS	9B02NB
4.10/3.50-4	TR-87	20	BIAS	9B03NB
11X4.00/4.50/6.00-5	TR-87	20	BIAS	9B04NB
4.10/3.50-5	TR-13	20	BIAS	9B05NB
4.10/3.50-5	TR-87	20	BIAS	9B06NB
4.10/3.50-6	TR-13	20	BIAS	9B07NB
4.10/3.50-6	TR-87	20	BIAS	9B09NB
13X5.00-6(5.30/4.50-6)	TR-13	20	BIAS	9B10NB
13X5.00-6	TR-87	20	BIAS	9B12NB
15X6.00-6	TR-13	20	BIAS	9B15NB
15X6.00-6	TR-87	20	BIAS	9B16NB
3.25/3.50-8	TR-13	20	BIAS	9B19NB
18X7-8	TR-87	20	BIAS	9B32NB
5.00/5.70R-8	TR-JS2	10	RADIAL	9R20NB

Lawn, Garden & Golf **Tubes**

Tube Size	Valve	Box Quantity	Type	Part Number
TUBES CONTINUED				
4.00/4.80R-8	TR-13	10	RADIAL	9R21NB
4.80R-8	TR-87	10	RADIAL	9R22NB
5.00/5.70R-8	TR-13	10	RADIAL	9R24NB
5.70R-8	TR-87	10	RADIAL	9R25NB
16X6.50/7.50R-8	TR-13	10	RADIAL	9R27NB
16X6.50/7.50R-8	TR-87	20	RADIAL	9R28NB
18X8.50/9.50R8	TR-13	10	RADIAL	9R30NB
21X12.00/22X11.00R-8	TR-6	10	RADIAL	9R33NB
25X12.00R-9	TR-6	10	RADIAL	9R36NB
20.5X8R-10	TR-13	10	RADIAL	9R39NB
23X8.50/9.50R-12	TR-13	10	RADIAL	9R42NB
23X8.50/9.50R-12	TR-87	10	RADIAL	9R43NB
26X12.00R-12	TR-13	10	RADIAL	9R44NB
26X12.00R-12	TR-15	10	RADIAL	9R45NB
23X8.50/9.50R-12	TR-JS2	10	RADIAL	9R46NB
27X9.50/10.50R-12	TR-13	10	RADIAL	9R48NB
4.50/5.30R-12	TR-13	10	RADIAL	9R51NB
22X8-10	TR-6	30	RADIAL	9R60NB
21X7-12 D/B WEIGHT	TR-JS2	10	RADIAL	9R70NB
21X7-12 D/B WEIGHT	TR-218A	10	RADIAL	9R71NB
24X8-14 D/B WEIGHT	TR-JS2	10	RADIAL	9R73NB
24X8-14 D/B WEIGHT	TR-218A	10	RADIAL	9R74NB
26X9-14.5 D/B WEIGHT	TR-JS2	10	RADIAL	9R75NB

Wheels

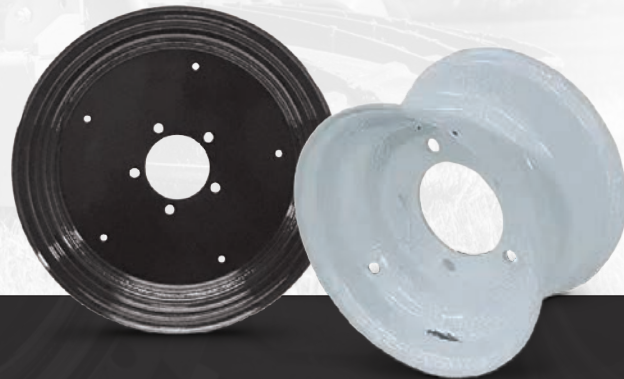

ROTARY CUTTER WHEELS

ROTARY CUTTER wheels are available for select RIB tires. These wheels are designed to withstand shock and vibration, with tight tolerancing to ensure durability and performance. OTR's wheels are protected from corrosion and exposure to extreme weather. Sizes range from 12 to 18 inches, in one- and two-piece configurations.



Wheel Size	Fits Tire Size	Diameter	Depth	Bolt Pattern	Pilot Hole	Nut Angle	Color	Pieces	Part Number
		IN (MM)	IN (MM)	IN (MM)	IN (MM)				
12X5	21X7.00-12	12 (304.8)	5 (127.0)	5 ON 5.5 (5 ON 139.7)	4 (101.6)	FLAT	BLACK	1	W125002
12X5	21X7.00-12	12 (304.8)	5 (127.0)	4 ON 5 (4 ON 127.0)	3.65 (92.7)	90°	JD YELLOW	1	1205002572
12X5.5	21X7.00-12	12 (304.8)	5.5 (139.7)	4 ON 5 (4 ON 127.0)	3.65 (92.7)	90°	BLACK	2	W1255001
12X5.5	21X7.00-12	12 (304.8)	5.5 (139.7)	4 ON 5 (4 ON 127.0)	3.6 (91.4)	90°	JD YELLOW	2	W1255004
14X6.00	24X8.00-14	14 (355.6)	6 (152.4)	4 ON 5 (4 ON 127.0)	3.65 (92.7)	90°	BLACK	2	146001009
14X6.00	24X8.00-14	14 (355.6)	6 (152.4)	5 ON 5.5 (5 ON 139.7)	4 (101.6)	90°	BLACK	2	W146002
14.5X6.00	26X9.00-14.5	14.5 (368.3)	6 (152.4)	5 ON 5.5 (5 ON 139.7)	4 (101.6)	90°	BLACK	2	W1456001
18X6.00	25X7.00-18 27X8.00-18	18 (457.2)	6 (152.4)	5 ON 5.5 (5 ON 139.7)	4 (101.6)	FLAT	BLACK	1	W186004

UNIVERSAL FIT FRONT WHEELS

UNIVERSAL FIT FRONT wheels are available in 4-, 5-, and 6-inch diameters, which makes them ideal for the most popular sizes of lawn, garden, and turf tires. Available with steel or aluminum construction; color options include white or black. All OTR wheels are engineered with tight tolerances to ensure fitment, stability, and durability.



Wheel Size	Fits Tire Size	Diameter	Depth	Hub Length	Center ID	Bearing Type	Color	Part Number
		IN (MM)	IN (MM)	IN (MM)	IN (MM)			
4X2.25	4.10/3.50-4	4 (101.6)	2.25 (57.2)	3.5 (88.9)	16.0 (406.4)	CAGE	WHITE	W4225006
5X3	11X4.00-5	5 (127.0)	3 (76.2)	4 (101.6)	16.0 (406.4)	SEALED	WHITE	W53025
5X3	11X4.00-5	5 (127.0)	3 (76.2)	4.1 (104.1)	13.5 (342.9)	SEALED	WHITE	W53012
6X3.25	13X5.00-6	6 (3.25)	3.25 (82.6)	5.6 (142.2)	13.5 (342.9)	SEALED	WHITE	W6325018
6X3.25	13X5.00-6	6 (3.25)	3.25 (82.6)	5.8 (147.3)	13.5/18.8 (342.9/477.5)	TAPER	WHITE	W6325015
6X4.5	13X6.50-6 15X6.00-6	6 (3.25)	4.5 (152.4)	7.3 (185.4)	13.5/18.8 (342.9/477.5)	TAPER	BLACK	W645014
6X4.5	13X6.50-6 15X6.00-6	6 (3.25)	4.5 (152.4)	7.3 (185.4)	13.5/18.8 (342.9/477.5)	TAPER	WHITE	W645007
6X4.5	13X6.50-6 15X6.00-6	6 (3.25)	4.5 (152.4)	6.97 (177.0)	13.5/18.8 (342.9/477.5)	TAPER	BLACK	W645022

STYLED OTR ALUMINUM WHEELS

Styled aluminum wheels are available for select golf and personal transit vehicles.





UNIVERSAL FIT REAR WHEELS

UNIVERSAL FIT REAR wheels range from 8 to 12 inches in diameter, covering the most popular lawn, garden, and turf tires and applications. Available with steel or aluminum construction in almond, white, or silver. All OTR wheels are engineered with tight tolerances to ensure fitment, stability, and durability.



Wheel Size	Fits Tire Size	Diameter	Depth	Bolt Pattern	Offset	Color	Part Number
		IN (MM)	IN (MM)	IN (MM)	IN (MM)		
8X3.75	4.80X8	8 (203.2)	3.75 (95.3)	4 ON 4 (4 ON 101.6)	0	WHITE	W8375006
8X3.75	4.80-8	8 (203.2)	3.75 (95.3)	5 ON 4.5 (5 ON 114.3)	0	WHITE	W8375009
8X5.375	16X6.50-8	8 (203.2)	5.375 (136.5)	4 ON 4 (4 ON 101.6)	0	WHITE	W85375001
8X5.375	16X6.50-8	8 (203.2)	5.375 (136.5)	5 ON 4.5 (5 ON 114.3)	0	WHITE	W85375007
8X6.188	16X7.50-8	8 (203.2)	6.188 (157.2)	4 ON 4 (4 ON 101.6)	-1.3 (-33.0)	WHITE	W86188006
8X6.93	18X8.50-8	8 (203.2)	6.93 (176.0)	4 ON 4 (4 ON 101.6)	-0.89 (-22.6)	WHITE	W8693003
8X7	18X8.50-8	8 (203.2)	7 (177.8)	4 ON 4 (4 ON 101.6)	0.08 (2.0)	BLACK	W87007
8X7	18X8.50-8	8 (203.2)	7 (177.8)	4 ON 4 (4 ON 101.6)	0.08 (2.0)	WHITE	W87008
8X7	18X8.50-8	8 (203.2)	7 (177.8)	4 ON 4 (4 ON 101.6)	0.08 (2.0)	ALMOND	W87012
8X7	18X8.50-8	8 (203.2)	7 (177.8)	4 ON 4 (4 ON 101.6)	0	WHITE	W87011
8X7	18X8.50-8	8 (203.2)	7 (177.8)	5 ON 4.5 (5 ON 114.3)	-0.08 (-2.0)	WHITE	W87010
9X10	25X12.00-9	9 (228.6)	10 (254.0)	5 ON 4.5 (5 ON 114.3)	0.5 (12.7)	WHITE	W910001
10X6	20X8.00-10	10 (254.0)	6 (152.4)	4 ON 4 (4 ON 101.6)	0	WHITE	W106011
10X6	20X8.00-10	10 (254.0)	6 (152.4)	5 ON 4.5 (5 ON 114.3)	-0.31 (-7.9)	WHITE	W106006
10X7	18X8.50-10	10 (254.0)	7 (177.8)	4 ON 4 (4 ON 101.6)	-0.5 (-12.7)	WHITE	W10705
10X7	18X8.50-10	10 (254.0)	7 (177.8)	5 ON 4.5 (5 ON 114.3)	-1.38 (-35.1)	WHITE	W10720
10X8.5	20X11/12.00-10	10 (254.0)	8.5 (215.9)	4 ON 4 (4 ON 101.6)	-1.23 (-31.2)	WHITE	W1085006
12X7	23X8.50-12	12 (304.8)	7 (177.8)	4 ON 4 (4 ON 101.6)	-0.75 (-19.1)	WHITE	W127007
12X7	23X8.50-12	12 (304.8)	7 (177.8)	5 ON 4.5 (5 ON 114.3)	0	WHITE	W127025

Wheel Size	Fits Tire Size	Diameter	Depth	Bolt Pattern	Offset	Color	Part Number
		IN (MM)	IN (MM)	IN (MM)	IN (MM)		
UNIVERSAL FIT REAR WHEELS <i>CONTINUED</i>							
12X8	25X10.00-12	12 (304.8)	8 (203.2)	5 ON 4.5 (5 ON 114.3)	0	ALUMINUM	W128004
12X8.5	23X10.50-12	12 (304.8)	8.5 (215.9)	4 ON 4 (4 ON 101.6)	-1 (-25.4)	WHITE	W1285046
12X8.5	23X10.50-12	12 (304.8)	8.5 (215.9)	5 ON 4.5 (5 ON 114.3)	0.81 (20.6)	WHITE	W1285034
12X10.5	26X12.00-12	12 (304.8)	10.5 (266.7)	4 ON 4 (4 ON 101.6)	-1.125 (-28.6)	WHITE	W12105039
12X10.5	26X12.00-12	12 (304.8)	10.5 (266.7)	5 ON 4.5 (5 ON 114.3)	0	WHITE	W12105013
12X10.5	26X12.00-12	12 (304.8)	10.5 (266.7)	6 ON 6 (6 ON 152.4)	0	WHITE	W12105033



Custom Wheels

In need of a unique solution? OTR designs and manufactures custom steel wheels for specialty situations, such as small- to medium-sized utility tractors and other equipment. Custom wheels are typically developed to fit popular tire styles and sizes, with designs approved and preferred by OEM customers.



NDX™ AIRLESS TIRE

OTR's game-changing, patent-pending tire & wheel **LASTS OVER 2X LONGER than other airless options.**

NDX lasts up to 2x longer than other airless tire options, even when carrying heavy loads and after sustaining damage. It just keeps rolling, no matter what, ensuring more value and a better ROI.

KEY FEATURES:

- No flat tires = NO downtime or loss of productivity.
- Long-lasting and ultra-durable, ideal for worksites.
- Exceptional traction, grip and handling on rough terrain.
- Comfortable ride – same or better than pneumatics.
- Wide contact patch enhances stability and braking.

*NDX technology available with GRASS MASTER (p.7-10) and ZERO-T II (p.15).



NDX Commercial Turf



- Supports loaded grass catchers with no tire impact.
- Supports loads up to 880 lbs at 10-20 PSI.

NDX Powersports



- On OTR's figure-eight test track, a **1-1/2" hole was drilled into the sidewall** of the NDX tire. It was then placed under a 1,000-lb. load and driven for 1,000 miles with no degradation in performance.

An ECO-Friendly Mobility Solution

NDX tires reduce fuel consumption by up to 10%, making them an eco-friendly solution. Plus, tires lasts longer, resulting in less waste.



Air Ready

Though designed to operate completely airless and deliver an extremely smooth ride, air can be added to NDX tires for enhanced ride comfort.

NDX Warranty

The NDX warranty term extends to three (3) years from date of purchase. Coverage is terminated once tread depth reaches 3 mm (or 4/32"), as will be indicated by tread wear indicator (TWI) tabs located between the treads and on the sidewalls.

See warranty document for full details.



1 flat tire every other week

=

26 flat tires annually

1 flat tire

=

2 hours of downtime

2 hours of downtime

=

52 hours of lost productivity annually

\$300
cost per incident
(lost productivity + labor)

=

\$7,800
in opportunity costs

Zero-Turn, Riding & Stand-On Mowers:

4 vehicles in the average fleet = **\$31,200**
lost annually

Utility & Rough Terrain Vehicles:


10 vehicles in the average fleet = **\$78,000**
lost annually

Services



MOUNTING & SEQUENCING

In addition to tires and wheels, OTR provides tire and wheel mounting sequencing, just-in-time delivery, and warehousing for OEM customers. Facilities are located around the world, close to OEM customers' locations. Key processes are automated, with automatic tire inflation systems that are repeatable and accurate.

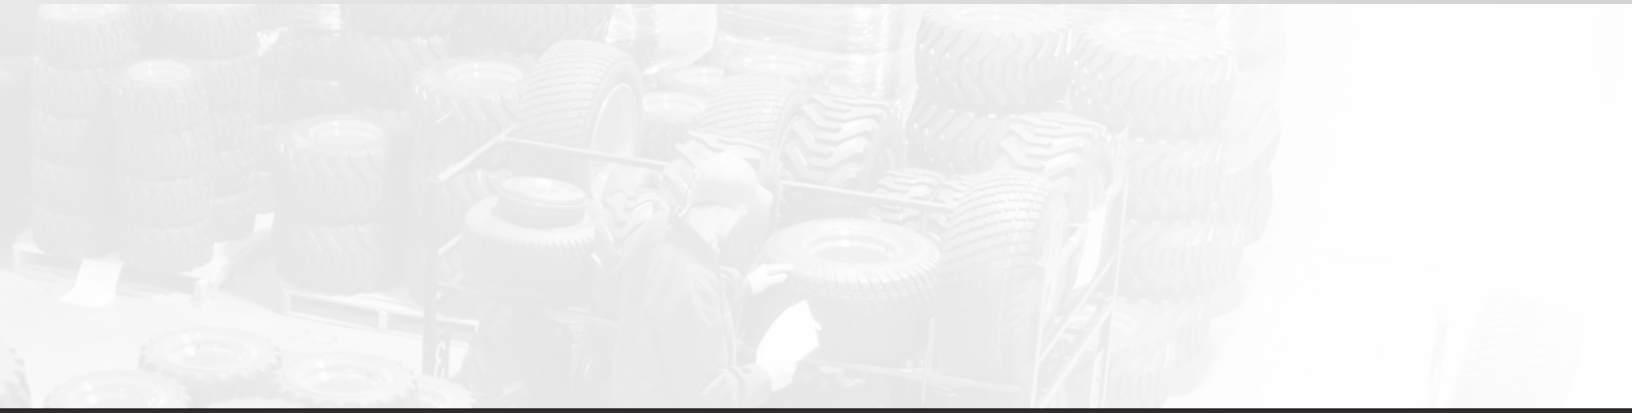

TyrLyner®

TyrLyner® is a proprietary rubber urethane securely applied to the inside of a tire's casing to extend life and enhance safe operation. Its "self-healing" technology ensures the tire is sealed when punctured or cut by objects up to ¼-inch diameter. The coating is applied at an OTR facility for OEMs and distributors who support fleets and owner-operators engaged in construction work, where downtime is NOT an option.



CONTACT INFORMATION

OEM Inquiries: Contact your local OTR salesperson or email sales@otrwheel.com.

Aftermarket Inquiries: Contact your local OTR salesperson or call 800-833-6309 (east of the Mississippi River) or 888-455-4910 (west of the Mississippi).

Trans American Rubber Tubes, Flaps, or Accessories: Call 800-922-8823 for additional information.

WARRANTY INFORMATION

OTR's standard Mechanical Warranty can be found at <https://www.otrwheel.com/general-information-and-technical-support-training-warranty/>

CATALOG DISCLAIMER

Product specifications and information were correct as of the date of this catalog release, but are subject to change without notice or obligation. Every effort has been made to ensure the accuracy of this catalog. Consult with your salesperson if you wish to verify data is correct.

ISO 9001: 2015 CERTIFICATION

OTR facilities are ISO 9001: 2015 registered (except for new locations where certifications are in process). ISO ensures consistent product quality, standardization, documentation, and compliance with OEM requirements.

REACH COMPLIANCE

OTR's custom tires for OEMs can be designed with REACH compliance. Consult with your salesperson as needed.

A series of horizontal dotted lines spanning the width of the page, providing a guide for handwriting practice.



Engineered Solutions

OTR's Commitment:

SOLUTIONS

OTR doesn't just sell tires and wheels, we diagnose problems and provide solutions.

VALUE

OTR optimizes ROI with high performance & value-added services to deliver results.

INNOVATION

OTR has a passion for innovating solutions that exceed customer expectations.

PARTNERSHIP

We're not just a vendor, we're a long-term partner who will support your business.

+1.800.833.6309

www.otrwheel.com

